

User Manual for PoE to USB-C Adapter

PT-PGCS-AF

Overview


PT-PGCS-AF is an indoor PoE to USB-C adapter. It allows power and data obtained from an IEEE802.3af PoE injector or PoE switch to be provided to USB-C PD and network connectivity through the adapter.

PT-PGCS-AF features a white plastic housing design, making it portable for on-the-go use or for fixed installations. The device operates within a safe voltage input of up to 57V and provides a power output of 5V/2A and network data at 10/100/1000Mbps. The effective distance for PoE transmission via Cat5e/Cat6 Ethernet cable is 100 meters.


PT-PGCS-AF is compatible with most tablets, Android smartphones, and the latest Apple smartphones with USB-C interface. When no PoE power source is fed, it can be regarded as a Gigabit Ethernet converter. That is Ethernet signal can be transmitted through two connected devices. Additionally, a 30cm USB-C cable were provided, with options of either a "90-degree" or straight cable for users to choose accordingly.

Appearance


Front View

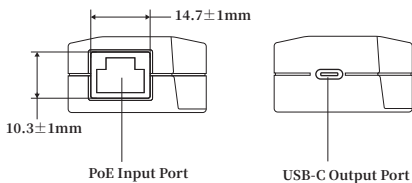

Top View



Side View




Product Specifications

Item	PT-PGCS-AF
Input	40~57Vdc PoE injector/PoE Switch 802.3af
Input Power Pins	4/5(+), 7/8(-) or 3/6(+), 1/2(-) or 3/6(-), 1/2(+)
Output	5Vdc 2.0A 10W

Item	PT-PGCS-AF
Data Speed	10/100/1000Mbps
Network Protocols	IEEE802.3 10Base-T Ethernet , IEEE802.3u 100Base-Tx Fast Ethernet
Operate Temperature	0°C-40°C
Operate Humidity	20%~80%, non-condensation
Storage Temperature	-20°C-85°C
Storage Humidity	10%~90%, non-condensation
Operate Altitude	Up to 2000 meters
Enclosure	White Plastic
Mounting	Wall-mounted
Protection Rate	IP40
Dimensions	81.3mm X 34.7mm X 19mm(50g)

Product Connection Diagram

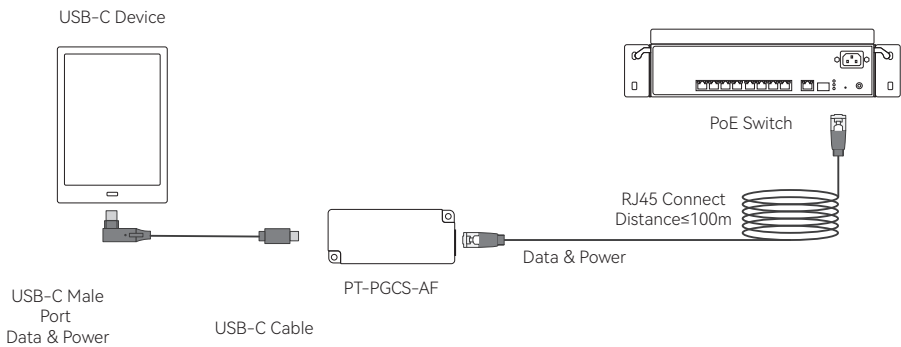

Precautions

- Please select a suitable power – supply device to connect to this product according to the instructions.
- This device is only for indoor use.
- Connect the PoE Ethernet cable to the PoE input port of this product. Use CAT5 or higher-grade cables, with a length not exceeding 100 meters.
- Do not place heavy objects on this device.
- When used with a continuous power supply over a long period, some devices may experience battery swelling or reduced energy storage capacity. Therefore, avoid prolonged charging when using this product.

