

Specification

Standard

- IEEE802.3 10Base-T Ethernet
- IEEE802.3u 100Base-Tx Fast Ethernet
- IEEE802.3ab 1000Base-T Gigabit Ethernet
- Support terminal equipment with IEEE802.3af
- RoHS Compliance
- WEEE Compliance

Input & Output

- Input :100-240Vac 0.5A 50/60Hz
- Output: 48Vdc 320mA
- Power Pins: 4/5(+), 7/8(-)
- Data Speed: 10/100/1000Mbps

Working Environment

- Operating Temperature: 0℃ to 40℃
- Operating Humidity: 20% to 80%, non-condensation
- Storage Temperature: -20℃ to 70℃
- Storage Humidity: 10% to 90%, non-condensation
- Operating Altitude: up to 2000meters

AC Surge Protection

- 1.0KV (5P/5N)
- L-N 1.2/50 (8/20) Tr/Th us
- 2.0KV (5P/5N)
- L-PE 1.2/50 (8/20) Tr/Th us
- N-PE 1.2/50 (8/20) Tr/Th us

Mechanical Characteristics

- Case: Plastic
- Color: Black
- Mounting: Wall-mounted
- IP Rated: IP40
- Size: 134mm X 56mm X 33mm
- Weight: 170g

Safety Approvals

- CE
- FCC

EMI

- FCC CFR47 Part 15, EN55024, EN55032

EMS


- IEC61000-4-2(ESD) ± 6kV(contact), ±8kV(air)
- IEC61000-4-3(RS) 10V/m(80MHz~2GHz)
- IEC61000-4-4(EFT) Power Port: ±2kV; Data Port:±1kV
- IEC61000-4-5(Surge) Power Port:±1kV/DM, ±2kV/CM
- IEC61000-4-6(CS) 10V(150kHz~80MHz)

Immunity

- IEC60068-2-6(Vibration)
- IEC60068-2-27(Impact)
- IEC60068-2-32(Free Fall)

LED Indicator

- Power Indicator : Green
- PoE Load Indicator : Green

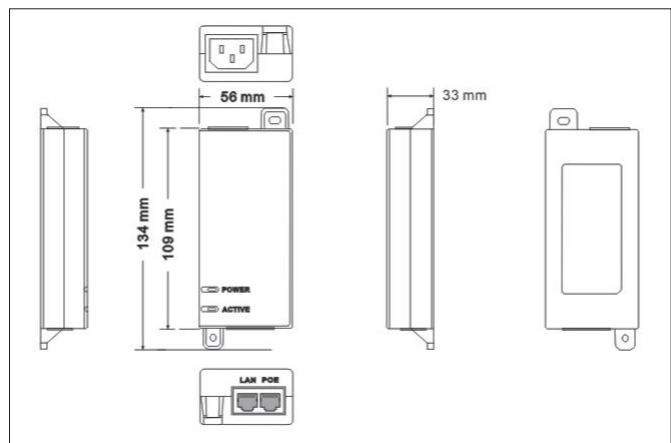

Order Info. PT-PSE100GFN

48Vdc/0.32A/1000Mbps/(4,5+,7,8-)/Passive

Packing. PT-PSE100GFN
Power Cord x 1 (Optional)
Manual x 1



This document belongs to PROCET company. It is not allowed to reproduce and modify without the original author's permission. It is PROCET's policy to improve its products as new technology, components, software, and firmware at any time. PROCET, therefore, reserves the right to change specifications without prior notice. (2019.03)

Single-port PoE Gigabit Midspan

PT-PSE100GFN

Product Overview


PT-PSE100GFN is a single port PoE Injector. It provides 48Vdc, 0.32A power for remote PDs over 2-pairs output. It supports both 10/100 Base-T and Gigabit device. It works for 15.4W PoE PDs, such as wireless APs, Network cameras, IP Phones and other power Ethernet terminals. It supports terminal equipments with IEEE802.3af standard.

PT-PSE100GFN is designed for indoor use. It works with input voltage of 100-240Vac. It will directly power PD without detection. The effective distance is 100 meters over Cat5e/Cat6 cables.

It is easy to install with two mounting holes.



Product Profile

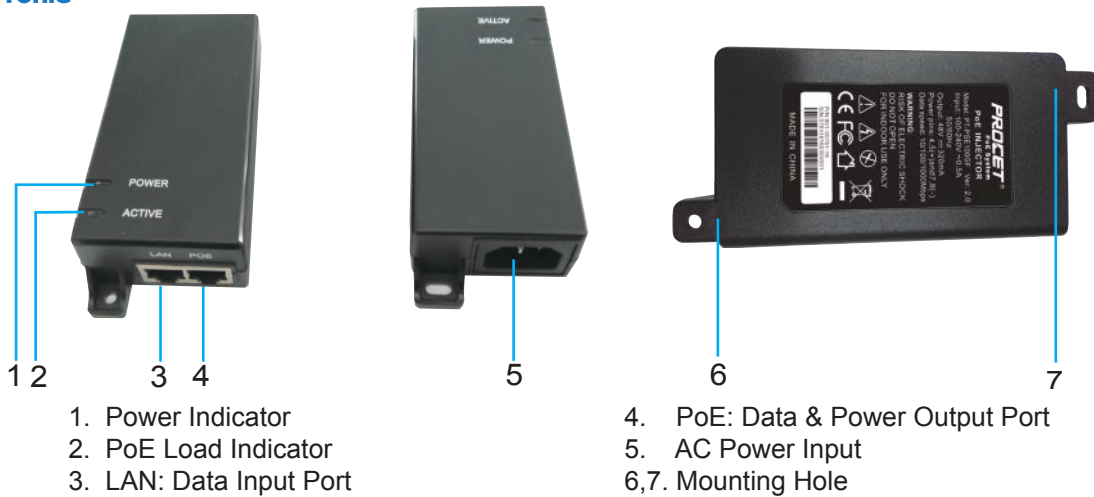

Product Working Diagram

