

# Single-Port 15.4W PoE Injector

## PT-PSE100GF

### **Product Overview**

PT-PSE100GF is a single port PoE Injector. It provides 48Vdc, 0.32A power for remote PDs over 2-pairs output. It supports both 10/100 Base-T and Gigabit device. It works for 15.4W PoE PDs, such as wireless APs, Network cameras, IP Phones and other power Ethernet terminals. It fully complies to IEEE802.3af PoE standard.

PT-PSE100GF is designed for indoor use. It works with input voltage of 100-240Vac. It has detection chip inside, which will detect and classify PD before powering it. It will not provide power until a standard-compliant PD is detected. The effective distance is 100 meters over Cat5e/Cat6 cables.



#### **Product Profile**




- 1. Power Indicator
- 2. PoE Load Indicator
- 3. LAN: Data Input Port



- 4. PoE: Data & Power Output Port
- 5. AC Power Input
- 6,7. Mounting Hole

### **Product Working Diagram**

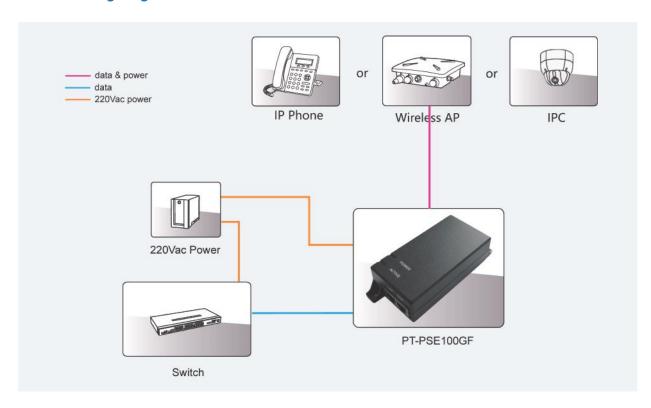

## **Specification**

#### **Standard**

- IEEE802.3 10Base-T Ethernet
- IEEE802.3u 100Base-Tx Fast Ethernet
- IEEE802.3ab 1000Base-T Gigabit Ethernet
- Full compliant with IEEE802.3af
- RoHS Compliance
- WEEE Compliance

### **Input & Output**

- Input :100-240Vac 0.5A 50/60Hz

Output: 48Vdc 320mAPower Pins: 4/5(+), 7/8(-)Data Speed: 10/100/1000Mbps

## **Working Environment**

- Operating Temperature: 0 °C to 40 °C

- Operating Humidity: 20% to 80%, non-condensation

- Storage Temperature: -20 °C to 70 °C

- Storage Humidity: 10% to 90%, non-condensation

- Operating Altitude: up to 2000meters

## **AC Surge Protection**

- 1.0KV (5P/5N)
- L-N 1.2/50 (8/20) Tr/Th us
- 2.0KV (5P/5N)
- L-PE 1.2/50 (8/20) Tr/Th us
- N -PE

#### **Mechanical Characteristics**

- Case: Plastic - Color: Black

- Mounting: Wall-mounted

- IP Rated: IP40

- Size: 134mm X 56mm X 33mm

- Weight: 175g

### **Safety Approvals**

- CE - FCC

### **EMI**

- FCC CFR47 Part 15, EN55024, EN55032

### **EMS**


- IEC61000-4-2(ESD) ± 6kV(contact), ±8kV(air)
- IEC61000-4-3(RS) 10V/m(80MHz~2GHz)
- IEC61000-4-4(EFT) Power Port: ±2kV; Data Port:±1kV
- IEC61000-4-5(Surge) Power Port:±1kV/DM, ±2kV/CM
- IEC61000-4-6(CS) 10V(150kHz~80MHz)

### **Immunity**

- IEC60068-2-6(Vibration)
- IEC60068-2-27(Impact)
- IEC60068-2-32(Free Fall)

#### **LED Indicator**

- Power Indicator : Green- PoE Load Indicator : Green

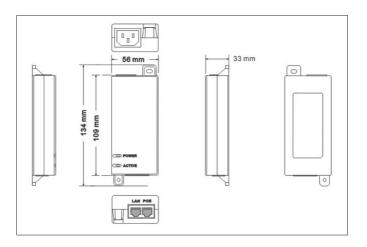

**Order Info.** PT-PSE100GF 48Vdc/0.32A/1000M/(4,5+,7,8-)/Active

Packing. PT-PSE100GF

Power Cord x 1 (Optional)

Manual x 1

