



PT-PTC-G-AT Gigabit PoE to USB-C Adapter

Overview

PT-PTC-G-AT is a gigabit PoE to USB-C power and data all-in-one adapter. It allows for the power and data obtained from an IEEE802.3at PoE injector or PoE switch to convert to USB-C PD. Support your USB-C device has stable wired network connectivity.

The device supports a safe voltage input range of 44 to 57 Vdc and provides a maximum power output of 23W along with 10/100/1000Mbps network data. The effective distance for PoE transmission via Cat5e/Cat6 Ethernet cable is 100 meters.


It is compatible with most USB-C devices in the market. Such as tablets, laptops, cellphones, small PCs/Next Unit of Computing (NUC) interactive information kiosks, smart monitors, cameras, and so on. Many bands of USB-C devices were tested, such as Samsung Galaxy Tablets, Microsoft Surface, Apple iPads, Android tablets/smartphones, some Chrome books, and other USB-C-powered devices. When the PoE power is disconnected, the unit of PT-PTC-G-AT will get power from your USB-C device and can work as an Ethernet signal converter to continue supporting data transfer.



Creative Lianjie Network Technology Co.Ltd

Tel:+861082873031 Email:sales@procetpoe.com
Fax:+861062963031 www.procetpoe.com

Product Working Diagram

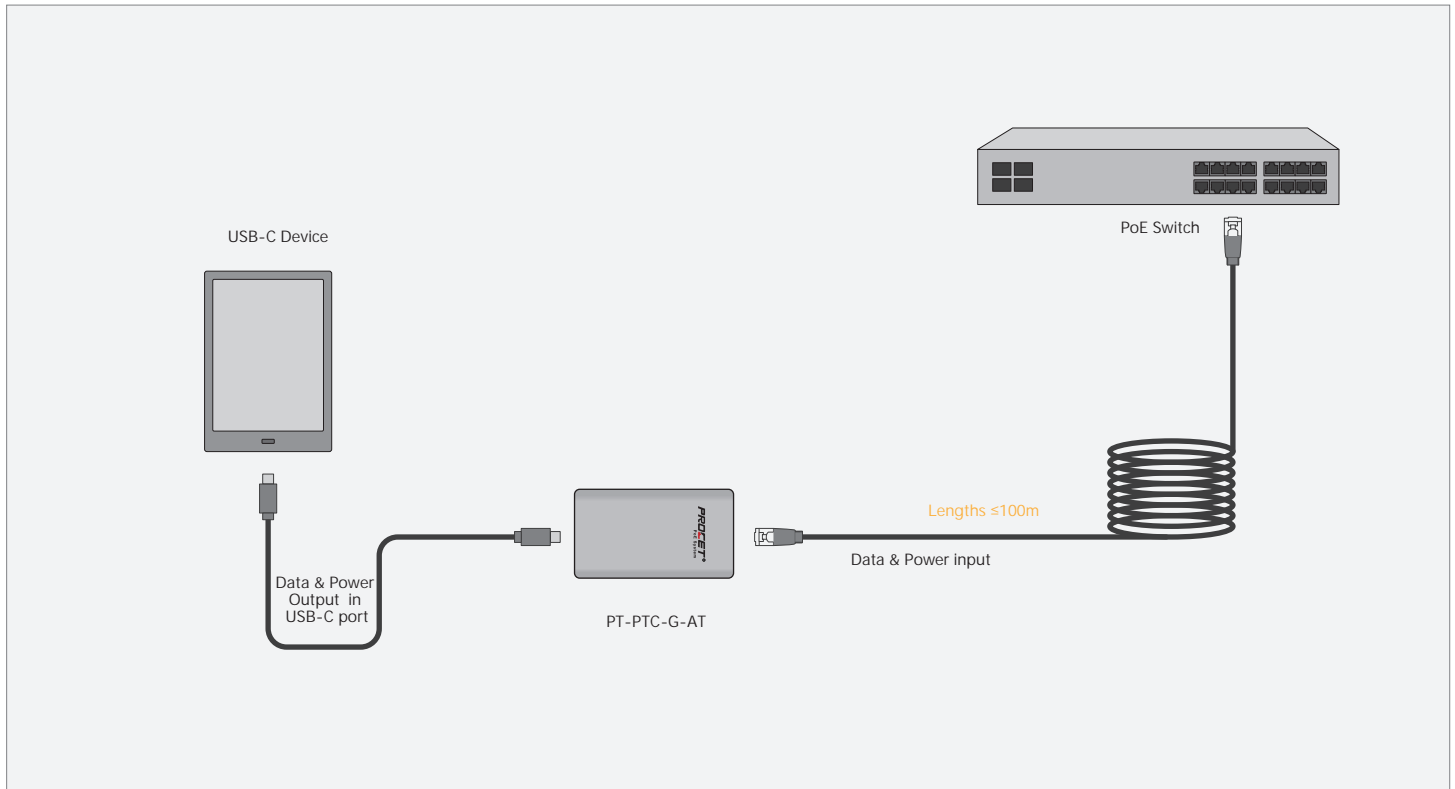

Specification

Standard	IEEE802.3i 10Base-T Ethernet
	IEEE802.3u 100Base-Tx Fast Ethernet
	IEEE802.3ab 1000Base-T Gigabit Ethernet
	USB Standard : USB 3.0
Output & Input	Operating Voltage : 44-57Vdc IEEE802.3at
	Power pins : 4/5(+), 7/8(-) & 3/6(+), 1/2(-)
	Output : 5V/2.6A, 9V/1.75A, 12V/1.45A, 15V/1.37A, 20V/1.15A
	Data rates : 10 / 100 / 1000Mbps
Operating Environment	Operating Temp. : 0°C to 40°C
	Operating Humidity. : 20% to 80% , non-condensation
	Operating Altitude : Up to 2000 meters
	Storage Temp. : -20°C to 70°C
	Storage Humidity : 10% to 90% , non-condensation
Mechanical Characteristics	Case : Plastic (White)
	IP Rated : IP40
	Dimensions : 91mm X 51mm X 18.5mm
	Weight : 61g