



*This diagram showcases the PT-PSE118GBR-OT product.

PT-PSE118GBR-OT_60W Series Outdoor PoE Injector

Product Overview

- * The product supports direct AC power supply.
- * With a wide temperature design, it can operate in environments ranging from -40°C to 65°C, making it suitable for outdoor use. It can achieve full-load startup at -40°C.
- * The PoE and AC ports provide surge protection of up to 6KV (common mode), ensuring safe and stable power delivery.
- * It complies with the EN55032 3m EMC test standard, offering high electromagnetic interference resistance.
- * The product supports full gigabit ports and is compatible with 10/100/1000Mbps network speeds.
- * The PT-PSE118GBR-OT-10 and PT-PSE118GBRN-OT-10 models support transmission speeds of up to 10Gbps.
- * Aluminum Alloy shell, IP67 waterproof protect rated, Waterproof metal cable glands, Excellent corrosion resistance.



**Creative Lianjie Network
Technology Co. Ltd**

Tel: +86 10 8287 3031

Email: sales@procetpoe.com


Fax: +86 10 6296 3031

www.procetpoe.com


PT-PSE118GR-OT Series Products and Their Differences

Model	PoE Standard	Data Rates	AC Input	Output	Power Pins	Port
PT-PSE118GBR-OT	IEEE802.3af/at/bt	10/100/1000Mbps	100-240Vac 1.5A(Max)	55Vdc 1.1A (Max) 60W	4,5(+)/7,8(-) 3,6(+)/1,2(-)	AC*1 PoE*1 LAN*1 Grounding*1
PT-PSE118GBR-OT-10	IEEE802.3af/at/bt	10/100/1000Mbps 2.5/5/10Gbps				
PT-PSE118GBRN-OT	Passive	10/100/1000Mbps				
PT-PSE118GBRN-OT-10	Passive	10/100/1000Mbps 2.5/5/10Gbps				

Connected Diagram

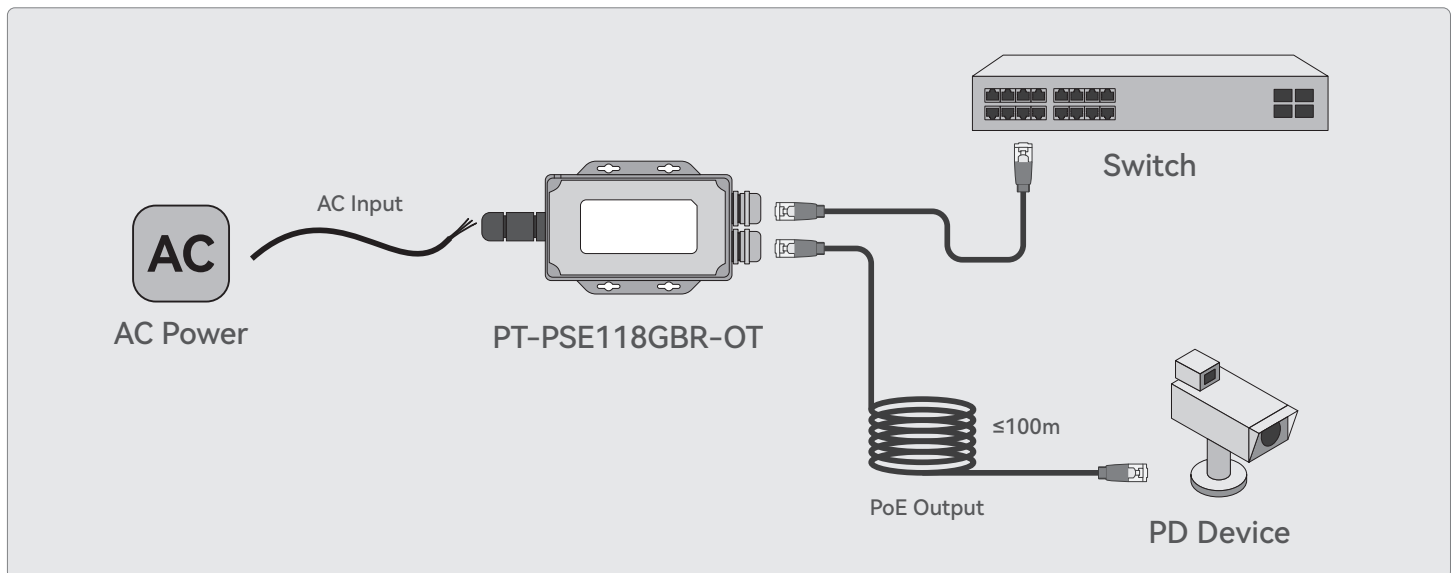

Installation diagram of column clamps

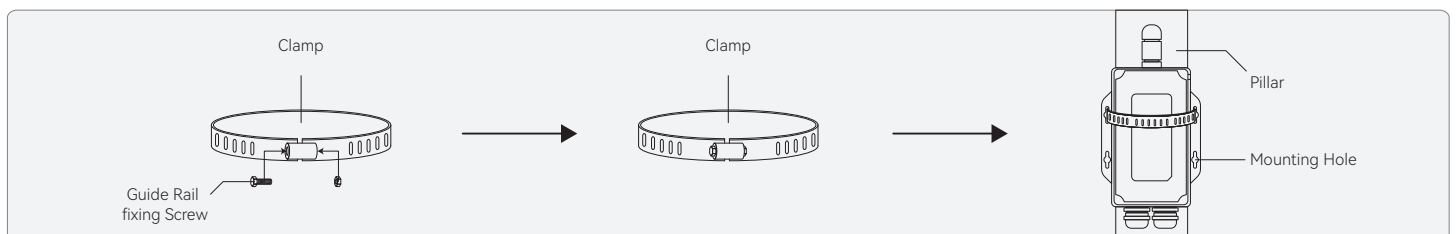

**Creative Lianjie Network
Technology Co. Ltd**

Tel: +86 10 8287 3031

Email: sales@procetpoe.com

Fax: +86 10 6296 3031

www.procetpoe.com

Specifications

Standard	IEEE802.3i 10Base-T Ethernet
	IEEE802.3u 100Base-Tx Fast Ethernet
	IEEE802.3ab 1000Base-T Gigabit Ethernet
	IEEE802.3af/at/bt
Input & Output	Interface: AC*1, PoE*1, LAN*1, Grounding*1
	AC Input: 100-240Vac 1.5A(Max)
	Output: - 55Vdc 1.1A(Max) 60W @50°C
	- 55Vdc 0.82A 45W @55°C
	- 55Vdc 0.55A 30W @65°C
	PoE Power Pins: 4,5(+)/7,8(-) 3,6(+)/1,2(-)
	Data Rates: 10/100/1000Mbps, 2.5/5/10Gbps
	PoE Surge Protection: - Protected line: 1,2,3,4,5,6,7,8
	- Common mode surge protection(10/700us): 6KV
	- Differential mode surge protection (10/700us): 1.5KV
	AC Surge Protection: - Line-Earth 1.2/50us (8/20us): 6KV
	- Line-Line 1.2/50us (8/20us): 4KV
Mechanical Characteristics	Operating Temperature: -40°C to 65°C
	Operating Humidity: 20% to 80%, non-condensation
	Case: Aluminium Alloy
	Color: White
	IP Rate: IP67
	Sizes: 211mm X 101mm X 42mm
	Weight: 628g



**Creative Lianjie Network
Technology Co. Ltd**

Tel: +86 10 8287 3031 Email: sales@procetpoe.com
Fax: +86 10 6296 3031 www.procetpoe.com