



PT-PR04G

Multi-Port PoE Surge Protector

Product Overview


PT-PR04G is Multi-port PoE surge protector, which has 4 pairs RJ45 ports can protect up to four separate Network cables. Each pair port can be PoE in or PoE out and supports 8 lines network signals and provides surge protection for PoE wires.

The maximum common mode surge voltage is 20KV(10/700us) and differential mode surge voltage is 1.5KV(10/700us). It supports 10/100/1000Mbps of data speed. It also supports PoE wires with IEEE802.3af/at/bt or PoE++ standard and protects your device against surge damage.

PT-PR04G is designed for indoor use with Zinc alloy shell, which works with 60Vdc Max voltage and operates under -40℃ to 85℃. It is connected to network over Cat5e/ Cat6 cables with RJ45 connector conveniently and tightly. This model can be placed on desk or equip standard DIN rail mounting bracket which can easily jam into the guide rail. The bracket is very flexible which can be fixed on back or side. There are also wall mounting tabs on either side if you do not like it to be rail-mounted.




Product Profile

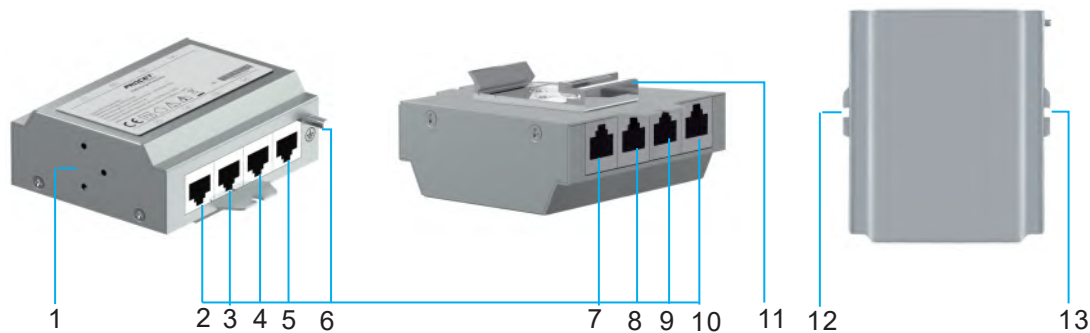

- 1. DIN Rail Mounting Bracket Holes
- 2.3.4.5.7.8.9.10 Surge Protector Input Or Output Port

- 6. Earth
- 11.DIN Rail Mounting Bracket(Can be removed)
- 12.13.Mounting tabs

Product Working Diagram

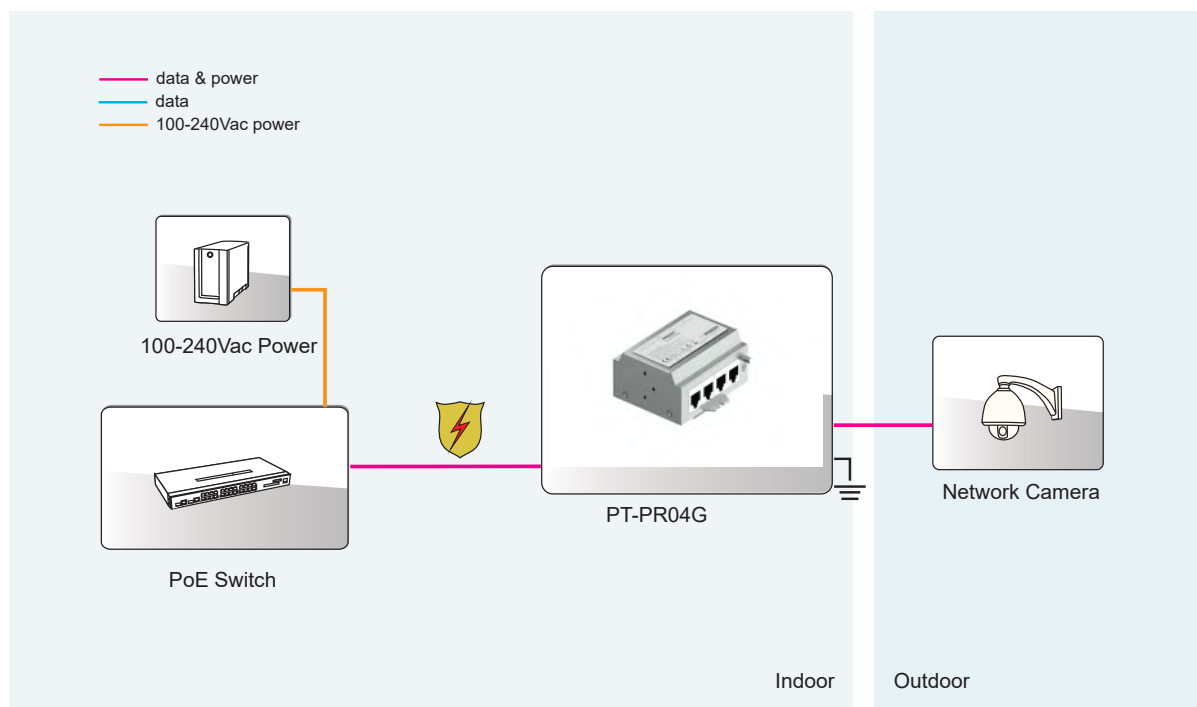

Specification

Standard

- IEEE802.3 10Base-T Ethernet
- IEEE802.3u 100Base-Tx Fast Ethernet
- IEEE802.3ab 1000Base-T Gigabit Ethernet
- Support PoE wire with IEEE802.3af/at standards
- Support 120W IEEE802.3bt and PoE++ standards
- RoHS Compliance
- WEEE Compliance

Input & Output

- Operating Voltage: 60Vdc Max
- Maximum Operating Power :Maximum 120W
- Data Speed: 10/100/1000Mbps

Working Environment

- Operating Temperature: -40℃ to 85℃
- Operating Humidity: 20% to 80%, non-condensation
- Storage Temperature: -40℃ to 85℃
- Storage Humidity: 10% to 90%, non-condensation
- Operating Altitude: up to 5000meters

PoE Surge Protection

- Max Discharge Current: 10KA(8/20us), 1.25KA per line
- Protected Line: 1,2,3,4,5,6,7,8
- Common Mode Protection Level(10/700us): 20KV
- Differential Mode Protection Level(10/700us): 1.5KV
- Insertion Loss @10MHz/100MHz: -1db
- Return Loss @10MHz/100MHz: -20db
- Response Time: 5ns

Mechanical Characteristics

- Case: Zinc alloy
- Color: Grey
- Mounting: DIN Rail mounted or Wall mounted
- IP Rated: IP40
- Size: 86.2mm X 86.6mm X 34.5mm
- Weight: 400g

Safety Approvals

- CE

EMI


- FCC CFR47 Part 15, EN55032, EN55035

EMS

- IEC61000-4-2(ESD) $\pm 6\text{kV}$ (contact), $\pm 8\text{kV}$ (air)
- IEC61000-4-3(RS) 10V/m(80MHz~2GHz)
- IEC61000-4-4(EFT) Power Port: $\pm 2\text{kV}$; Data Port: $\pm 1\text{kV}$
- IEC61000-4-5(Surge) Power Port: $\pm 1\text{kV/DM}$, $\pm 2\text{kV/CM}$
- IEC61000-4-6(CS) 10V(150kHz~80MHz)

Immunity

- IEC60068-2-6(Vibration)
- IEC60068-2-27(Impact)
- IEC60068-2-32(Free Fall)

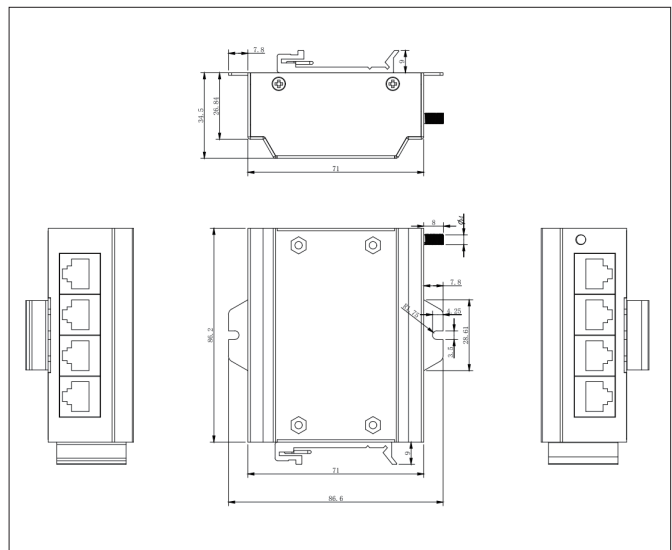

Order Info

PT-PR04G

Multi-Port PoE Surge Protector/60Vdc Max/1000Mbps/20KV Surge Protection

Packing

PT-PR04G

DIN Rail Mounting Bracket

Ground lug Wire: 16AWG

Manual x 1

This document belongs to PROCET company. It is not allowed to reproduce and modify without the original author's permission. It is PROCET's policy to improve its products as new technology, components, software, and firmware at any time. PROCET, therefore, reserves the right to change specifications without prior notice. (2025.05)