

# 90W



\*This diagram showcases the PT-PIS4PB1S-E-M product.

## PT-PIS4PB1-E Series

# Industrial-grade PoE Switch

## Product Overview

The PT-PIS4PB1-E Series is an industrial-grade, DIN-rail mountable device. DC power input can deliver a total power output of up to 360W.

Equipped detecting chip inside will make the PoE identification handshake with IEEE802.3af/at/bt PDs. All PoE ports support data speeds of 10/100/1000Mbps. Each port delivers a maximum output power of 90W with 4KV surge protection, suitable for high-power PTZ cameras, outdoor wireless radios, and fixed detection cameras in both commercial and industrial environments. It operates reliably in temperatures ranging from -40°C to 75°C, with full-load startup capability at -40°C. It meets the EN55032 3m EMC testing standard, ensuring excellent electromagnetic immunity. Users can choose P/N with fiber uplink or Ethernet uplink.

Models with an “M” in the P/N include Ethernet and PoE management functionalities. It can be accessed and managed via a web browser, supporting configurations such as IP settings, port settings, VLAN settings, PoE settings, and factory reset. Users can also view device information, including switch status, port status, and PoE status. Additionally, the PoE ports allow for scheduling timed power on/off operations.




**Creative Lianjie Network  
Technology Co. Ltd**

Tel: +86 10 8287 3031    Email: sales@cxlj.com.cn  
Fax: +86 10 6296 3031    www.procetpoe.com


## The Differences between PT-PIS4PB1-E Series Products

Model	PoE Standard	Input	Output	Power Pins	Managed	Port
PT-PIS4PB1S-E	IEEE802.3af/at/bt	12-55Vdc 10A(Max)	55Vdc 1.64A(Max) per port, Total 360W	4,5(+)/7,8(-) 3,6(+)/1,2(-)	N	DC*1 + SFP*1 + PoE*4 + Grounding*1
PT-PIS4PB1T-E					N	DC*1 + LAN*1 + PoE*4 + Grounding*1
PT-PIS4PB1S-E-M					Y	DC*1 + SFP*1 + PoE*4 + Grounding*1
PT-PIS4PB1T-E-M					Y	DC*1 + LAN*1 + PoE*4 + Grounding*1

## Connected Diagram

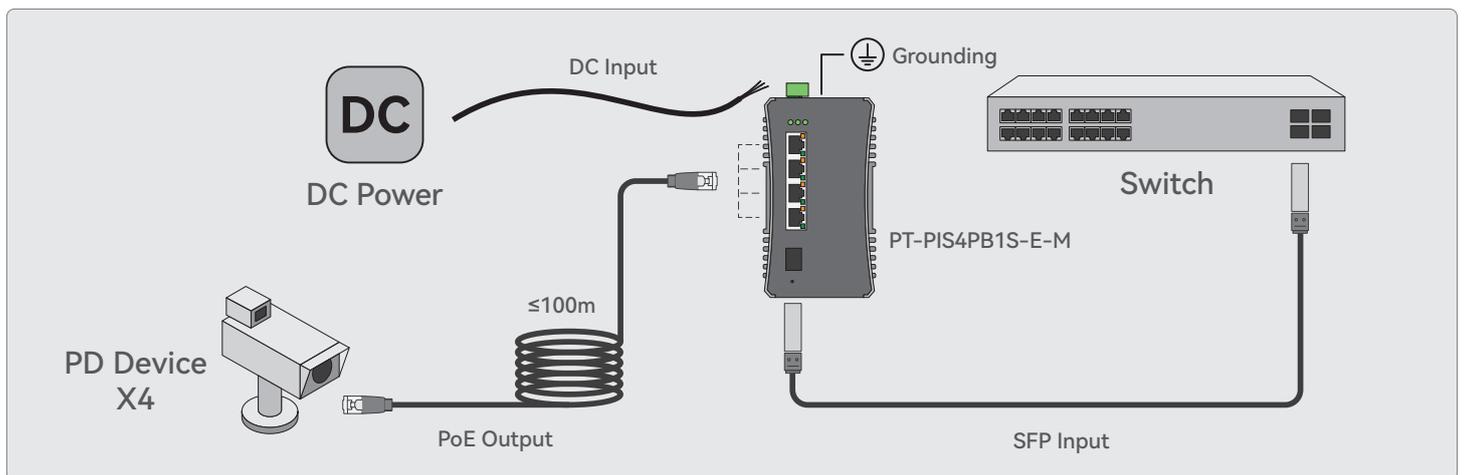

## DIN Guide Rail Installation

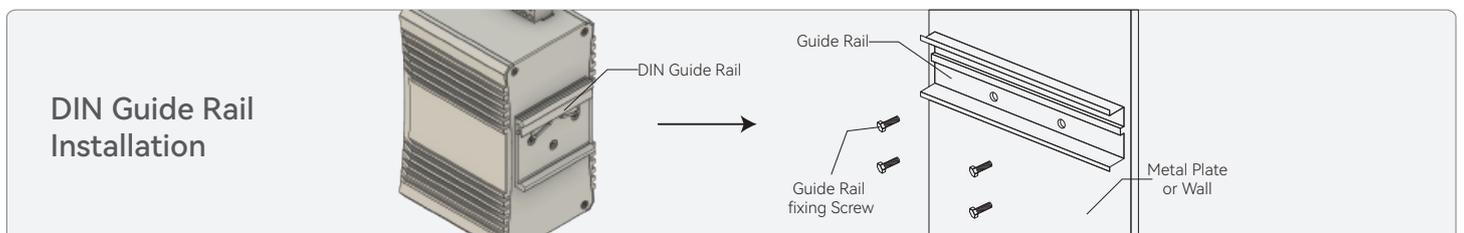

**Creative Lianjie Network  
Technology Co. Ltd**

Tel: +86 10 8287 3031 Email: sales@cxlj.com.cn  
Fax: +86 10 6296 3031 www.procetpoe.com

## Specifications

<b>Standard</b>	IEEE802.3i 10Base-T Ethernet
	IEEE802.3u 100Base-Tx Fast Ethernet
	IEEE802.3ab 1000Base-T Gigabit Ethernet
	IEEE802.3Z:1000Base-LX
	IEEE802.3af/at/bt
<b>Input &amp; Output</b>	Interface: DC*1, SFP/LAN*1, PoE*4, Grounding*1
	Input: 12-55Vdc 10A(Max)
	Output: 55Vdc 1.64A(Max) per port, Total 360W
	PoE Power Pins: 4,5(+)/7,8(-) 3,6(+)/1,2(-)
	Data Rates: RJ45 Ports 10/100/1000Mbps, SFP 1000Mbps
<b>Switching Parameters</b>	PoE Surge Protection: Common mode: 4KV Differential mode: 1.5KV
	Forwarding Mode: Store and Forward
	Backplane Bandwidth: 14Gbps
	MAC Address Capacity: 10K
	Packet Forwarding Rate: 7×1.488Mpps
<b>Mechanical Characteristics</b>	Operating Temperature: -40°C to 75°C
	Operating Humidity: 5% to 95%, non-condensation
	Case: Metal Case
	Color: Silver/Black
	IP Rate: IP40
	Sizes: 76mm X 95mm X 146mm
	Weight: 1230g

## The network management parameters (only for Models with an “M” in the P/N)

<b>Network Management</b>	Compliant with IEEE 802.1d standard
	Supports automatic MAC address learning
	Supports high-speed, non-blocking QoS architecture for four traffic classes
	Each port can choose Strict、Weighted、Mix QoS
	Supports 4096 VLAN IDs
	Supports 802.1Q VLAN
	Supports VLANs based on port across any combination of multiple chips



**Creative Lianjie Network  
Technology Co. Ltd**

Tel: +86 10 8287 3031 Email: sales@cxlj.com.cn  
Fax: +86 10 6296 3031 www.procetpoe.com