

## Specification

### Standard

- IEEE802.3 10Base-T Ethernet
- IEEE802.3u 100Base-Tx Fast Ethernet
- Full compliant with IEEE802.3af
- RoHS Compliance
- WEEE Compliance

### Input & Output

- Input :100-240Vac 0.5A 50/60Hz
- Output: 48Vdc 320mA
- Power Pins: 4/5(+), 7/8(-)
- Data Speed: 10/100Mbps

### Working Environment

- Operating Temperature: 0℃ to 40℃
- Operating Humidity: 20% to 80%, non-condensation
- Storage Temperature: -20℃ to 70℃
- Storage Humidity: 10% to 90%, non-condensation
- Operating Altitude: up to 2000meters

### AC Surge Protection

- 1.0KV (5P/5N)
- L-N 1.2/50 (8/20) Tr/Th us
- 2.0KV (5P/5N)
- L-PE 1.2/50 (8/20) Tr/Th us
- N-PE 1.2/50 (8/20) Tr/Th us

### Mechanical Characteristics

- Case: Plastic
- Color: White
- Mounting: Wall-plug
- IP Rated: IP40
- Size: 83mm X 51mm X 69mm
- Weight: 115g

### Safety Approvals

- CE
- FCC

### EMI

- FCC CFR47 Part 15, EN55024, EN55032

### EMS


- IEC61000-4-2(ESD) ± 6kV(contact), ±8kV(air)
- IEC61000-4-3(RS) 10V/m(80MHz~2GHz)
- IEC61000-4-4(EFT) Power Port: ±2kV; Data Port:±1kV
- IEC61000-4-5(Surge) Power Port:±1kV/DM, ±2kV/CM
- IEC61000-4-6(CS) 10V(150kHz~80MHz)

### Immunity

- IEC60068-2-6(Vibration)
- IEC60068-2-27(Impact)
- IEC60068-2-32(Free Fall)

### LED Indicator

- Power Indicator : Red
- PoE Load Indicator : Green

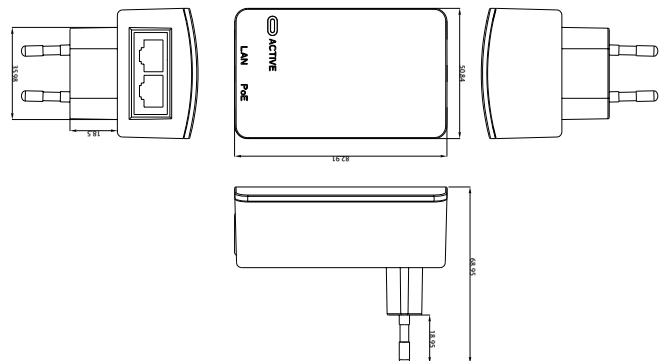

**Order Info.** PT-PSE10GF-EU

48Vdc/0.32A/100Mbps/(4,5+,7,8-)/Active/Plug EU standard

**Packing.** PT-PSE10GF-EU  
Manual x 1

# PROCET<sup>®</sup>

## PoE System



**PT-PSE10GF-EU**

### Wall Plug 802.3AF standard PoE Injector


#### Product Overview

PT-PSE10GF-EU is a single-port PoE Injector with European standard electrical plug, which is suitable for European socket. It provides 48Vdc, 0.32A power for remote PDs over 2 pairs output. It supports 10/100/1000Mbps of data speed and works for 15.4W PoE PDs, such as wireless APs, Network cameras, IP Phones and other power Ethernet terminals. It fully complies to IEEE802.3af PoE standard terminals.

PT-PSE10GF-EU is designed for plug and play indoor use with compact structure. It is of good performance but lower in cost. It works with input voltage of 100-240Vac. It has detection chip inside, which will detect and classify PD before powering it. It will not apply power until a standard-compliant PD is detected. The effective distance is 100 meters over Cat5e/Cat6 cables.



#### Product Profile

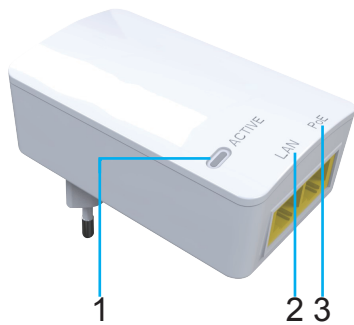

- 1. Active: PoE Load Indicator
- 2. LAN: Data Input Port



- 3. PoE: Data & Power Output Port
- 4.5. AC Power Input

#### Product Working Diagram

