



PoE To USB-C

Suitable for mobile:
phones, tablets, laptops

Network Adapter

Product Overview

PT-PTC-D-BT, is an Ethernet power adapter designed based on the IEEE802.3bt standard. with a standard USB-C interface, it provides output 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A according to your USB-C device need. It supports 10/100Mbps.

Product characteristics



Creative Lianjie Network Technology Co.,Ltd


Tel: +86 10 8287 3031

Fax: +86 10 6296 3031

E-mail: sales@procetpoe.com

www.procetpoe.com

Technical Parameters

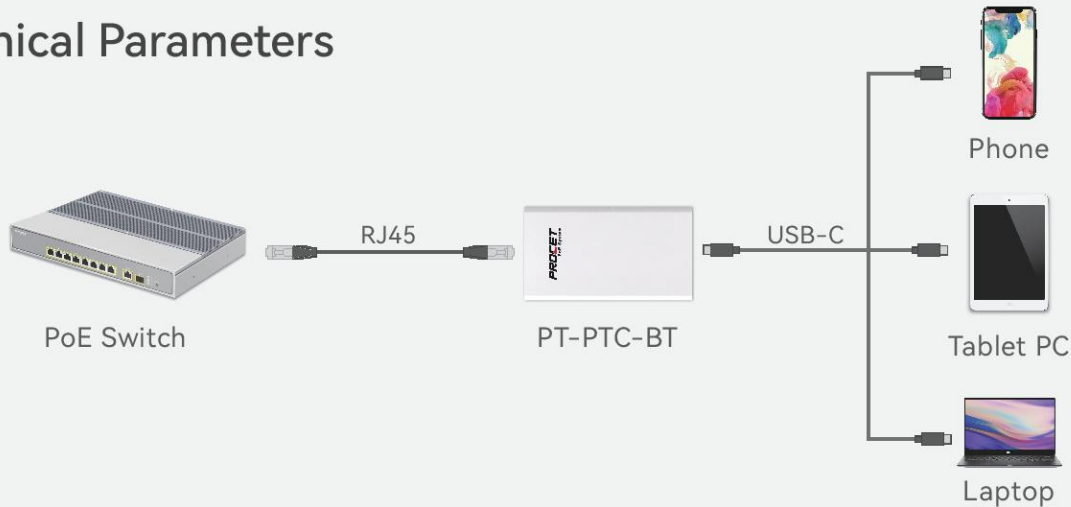

Application Environment



The Office



Smart Union



Checkstand



The Bedroom

**Technical
Parameters**

| | |
|-----------------------------------|--|
| Standard | IEEE802.3 10Base-T Ethernet |
| | IEEE802.3u 100Base-Tx Fast Ethernet |
| | Support PoE injector with IEEE802.3bt |
| | RoHS Compliance |
| | WEEE Compliance |
| Input & Output | Input :44-57Vdc IEEE802.3bt |
| | Pins: 4/5(+), 7/8(-) and 3/6(+), 1/2(-) or 4/5(+), 7/8(-) and 3/6(-), 1/2(+) |
| | Output: 5V3A, 9V3A, 12V3A, 15V3A, 20V3A |
| | Data Speed: 10/100 Mbps |
| Working Environment | Operating Temperature: -20°C to 40°C |
| | Operating Humidity: 20% to 80%, non-condensation |
| Safety Approvals | CE |
| EMI | FCC CFR47 Part 15, EN55032, EN55035 |
| Mechanical Characteristics | Case: Plastic |
| | Color: white |
| | IP Rated: IP40 |
| | Size: 100mm X 60mm X 22mm |
| | Weight: 129g |
| | Connectors: RJ45*1 USB-C*1 |