

Industrial DC to DC 95W BT PoE Injector

Product Overview

PT-PSE105GBH-E is a single-port, industrial-scale, boost PoE injector. It provides 55Vdc, 1.75A power for remote PDs over full 4 pairs output with 6KV (10/700us) surge protection. It supports 10/100/1000 of data speed. It works for 95W PoE PDs, such as wireless access points, network cameras, VoIP phones and other high power Ethernet terminals. It is fully compliant with IEEE802.3bt and also backward compatible to 802.3af/at standard.



PT-PSE105GBH-E

PT-PSE105GBH-E is designed for indoor use. It works with input voltage of 12-55Vdc and operates under -40 °C to 65 °C. It has detecting chip inside, which will detect and classify PD before powering it. It will not apply power until a standard-compliant PD is detected. The effective distance is 100m over Cat5e/Cat6 cables.

This model equipped standard DIN rail mounting bracket, which can easily jam into the guide rail.



Product Profile




1. DC input indicator
2. LAN input port
3. PoE output port
4. PoE load indicator



5. DC Input Port
6. DIN Rail Mounting Bracket
7. Earth

Product Working Diagram

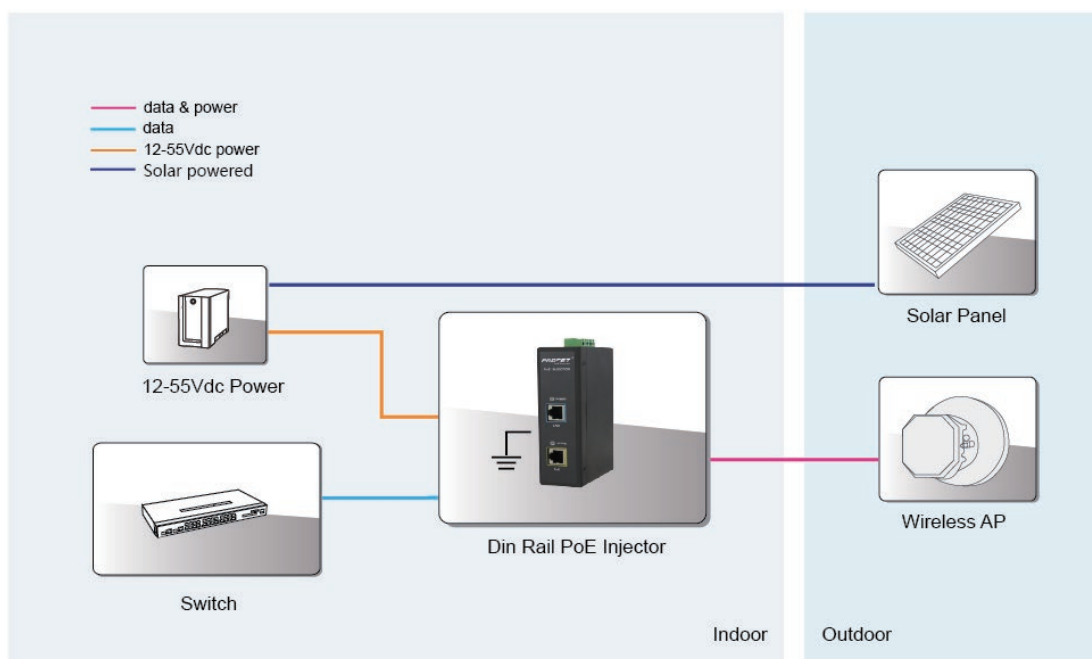

Specification

Standard

- IEEE802.3 10Base-T Ethernet
- IEEE802.3u 100Base-Tx Fast Ethernet
- IEEE802.3ab 1000Base-T Gigabit Ethernet
- Full compliant with IEEE802.3af/at/bt
- RoHS Compliance
- WEEE Compliance

Input & Output

- Input :12-55Vdc 10.0A(Max)
- Output: 55Vdc 1750mA
- Power Pins: 4/5(+), 7/8(-) & 1/2(-),3/6(+)
- Data Speed: 10/100/1000Mbps

Working Environment

- Operating Temperature: -40℃ to 65℃
- Operating Humidity: 20% to 80%, non-condensation
- Storage Temperature: -40℃ to 85℃
- Storage Humidity: 10% to 90%, non-condensation
- Operating Altitude: up to 5000meters

PoE Surge Protection

- Protected line: 1,2,3,4,5,6,7,8
- Common mode surge protection(10/700us): 6KV
- Differential mode surge protection (10/700us): 1.5KV

Mechanical Characteristics

- Case: Metal
- Color: Black
- Mounting: DIN-rail
- IP Rated: IP40
- Size: 144.5mm X 95mm X 35.4mm
- Weight: 400g

Safety Approvals

- CE

EMI

- FCC CFR47 Part 15, EN55032, EN55035

EMS


- IEC61000-4-2(ESD) $\pm 6\text{kV}$ (contact), $\pm 8\text{kV}$ (air)
- IEC61000-4-3(RS) 10V/m(80MHz~2GHz)
- IEC61000-4-4(EFT) Power Port: $\pm 2\text{kV}$; Data Port: $\pm 1\text{kV}$
- IEC61000-4-5(Surge) Power Port: $\pm 1\text{kV/DM}$, $\pm 2\text{kV/CM}$
- IEC61000-4-6(CS) 10V(150kHz~80MHz)

Immunity

- IEC60068-2-6(Vibration)
- IEC60068-2-27(Impact)
- IEC60068-2-32(Free Fall)

LED Indicator

- Power Indicator : Green
- PoE Load Indicator : Yellow

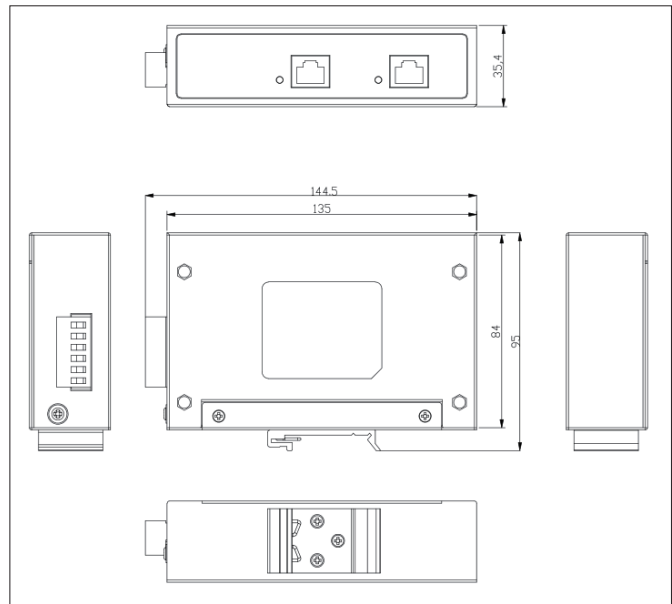

Order Info. PT-PSE105GBH-E

Boost/55Vdc/1.75A/1000Mbps/(4,5+,7,8-, 3/6+, 1/2-)/Surge Protection/BT

Packing

PT-PSE105GBH-E
Ground lug Wire: 16AWG
Manual x 1